

© Copyright SEK. Reproduction in any form without permission is prohibited.

Mättransformatorer –

Del 6: Allmänna tilläggsfordringar för mättransformator med låg uteffekt

Instruments transformers –

Part 6: Additional general requirements for low-power instrument transformers

Som svensk standard gäller europastandarden EN 61869-6:2016. Den svenska standarden innehåller den officiella engelska språkversionen av EN 61869-6:2016.

Nationellt förord

Europastandarden EN 61869-6:2016

består av:

- **europastandardens ikraftsättningsdokument**, utarbetat inom CENELEC
- **IEC 61869-6, First edition, 2016 - Instruments transformers - Part 6: Additional general requirements for low-power instrument transformers**

utarbetad inom International Electrotechnical Commission, IEC.

Standarden ska användas tillsammans med SS-EN 61869-1, utgåva 1, 2009.

Tidigare fastställd svensk standard SS-EN 60044-7, utgåva 1, 2000 och SS-EN 60044-8, utgåva 1, 2003, gäller ej fr o m 2019-12-23.

Standarder underlättar utvecklingen och höjer elsäkerheten

Det finns många fördelar med att ha gemensamma tekniska regler för bl a mätning, säkerhet och provning och för utförande, skötsel och dokumentation av elprodukter och elanläggningar.

Genom att utforma sådana standarder blir säkerhetsfordringar tydliga och utvecklingskostnaderna rimliga samtidigt som marknadens acceptans för produkten eller tjänsten ökar.

Många standarder inom elområdet beskriver tekniska lösningar och metoder som åstadkommer den elsäkerhet som föreskrivs av svenska myndigheter och av EU.

SEK är Sveriges röst i standardiseringsarbetet inom elområdet

SEK Svensk Elstandard svarar för standardiseringen inom elområdet i Sverige och samordnar svensk medverkan i internationell och europeisk standardisering. SEK är en ideell organisation med frivilligt deltagande från svenska myndigheter, företag och organisationer som vill medverka till och påverka utformningen av tekniska regler inom elektrotekniken.

SEK samordnar svenska intressenters medverkan i SEKs tekniska kommittéer och stödjer svenska experters medverkan i internationella och europeiska projekt.

Stora delar av arbetet sker internationellt

Utformningen av standarder sker i allt väsentligt i internationellt och europeiskt samarbete. SEK är svensk nationalkommitté av International Electrotechnical Commission (IEC) och Comité Européen de Normalisation Electrotechnique (CENELEC).

Standardiseringsarbetet inom SEK är organiserat i referensgrupper bestående av ett antal tekniska kommittéer som speglar hur arbetet inom IEC och CENELEC är organiserat.

Arbetet i de tekniska kommittéerna är öppet för alla svenska organisationer, företag, institutioner, myndigheter och statliga verk. Den årliga avgiften för deltagandet och intäkter från försäljning finansierar SEKs standardiseringsverksamhet och medlemsavgift till IEC och CENELEC.

Var med och påverka!

Den som deltar i SEKs tekniska kommittéarbete har möjlighet att påverka framtida standarder och får tidig tillgång till information och dokumentation om utvecklingen inom sitt teknikområde. Arbetet och kontakterna med kollegor, kunder och konkurrenter kan gynnsamt påverka enskilda företags affärsutveckling och bidrar till deltagarnas egen kompetensutveckling.

Du som vill dra nytta av dessa möjligheter är välkommen att kontakta SEKs kansli för mer information.

SEK Svensk Elstandard

Box 1284
164 29 Kista
Tel 08-444 14 00
www.elstandard.se

English Version

**Instrument transformers - Part 6: Additional general
requirements for low-power instrument transformers
(IEC 61869-6:2016)**

Transformateurs de mesure - Partie 6: Exigences générales
supplémentaires concernant les transformateurs de mesure
de faible puissance
(IEC 61869-6:2016)

Messwandler - Teil 6: Zusätzliche allgemeine
Anforderungen für Kleinsignal-Messwandler
(IEC 61869-6:2016)

This European Standard was approved by CENELEC on 2016-06-01. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

European foreword

The text of document 38/501/FDIS, future edition 1 of IEC 61869-6, prepared by IEC/TC 38 "Instrument transformers" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 61869-6:2016.

The following dates are fixed:

- latest date by which the document has to be (dop) 2017-06-23
implemented at national level by
publication of an identical national
standard or by endorsement
- latest date by which the national (dow) 2019-12-23
standards conflicting with the
document have to be withdrawn

This document is to be read jointly with, and is based on, EN 61869-1:2009, *General requirements*. However, the reader is encouraged to use the most recent edition of that document.

This document follows the structure of EN 61869 series and supplements or modifies the corresponding clauses in EN 61869-1 Standard.

When a particular clause/subclause of Part 1, is not mentioned in this Part 6, that clause/subclause applies as far as is reasonable. When this standard states "addition", "modification" or "replacement", the relevant text in Part 1 is to be adapted accordingly.

For additional clauses, subclauses, figures, tables, annexes or notes, the following numbering system is used:

– clauses, subclauses, tables, figures and notes that are numbered starting from 601 are additional to those in Part 1;

– additional annexes are lettered 6A, 6B, etc.

This document, jointly with EN 61869-1:2009, supersedes EN 60044-7:2000 (partially) and EN 60044-8:2002 (partially).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

Endorsement notice

The text of the International Standard IEC 61869-6:2016 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

IEC 60044-7:1999	NOTE	Harmonized as EN 60044-7:2000 (not modified).
IEC 60044-8:2002	NOTE	Harmonized as EN 60044-8:2002 (not modified)
IEC 61508-1	NOTE	Harmonized as EN 61508-1.
IEC 61508-3	NOTE	Harmonized as EN 61508-3.
IEC 61850 Series	NOTE	Harmonized as EN 61850 Series.
IEC 61869 Series	NOTE	Harmonized as EN 61869 Series.
IEC 61869-5	NOTE	Harmonized as EN 61869-5.
IEC 61869-9	NOTE	Harmonized as EN 61869-9.
IEC 61869-10	NOTE	Harmonized as EN 61869-10.
IEC 61869-11	NOTE	Harmonized as EN 61869-11.

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 When an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cenelec.eu

Annex ZA of EN 61869:2009 is applicable with the following additions:

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
-	-	Voltage characteristics of electricity supplied by public electricity networks	EN 50160	2010
IEC 60068-2-6	2007	Environmental testing - Part 2-6: Tests - Test Fc: Vibration (sinusoidal)	EN 60068-2-6	2008
IEC 60255-27	2013	Measuring relays and protection equipment - Part 27: Product safety requirements	EN 60255-27	2014
IEC 60603-7-1	2011	Connectors for electronic equipment - Part 7-1: Detail specification for 8-way, shielded, free and fixed connectors	EN 60603-7-1	2011
IEC 60794-2	2002	Optical fibre cables - Part 2: Indoor cables - Sectional specification	EN 60794-2	2003
IEC 60794-3	2014	Optical fibre cables - Part 3: Outdoor cables - Sectional specification	EN 60794-3	2015
IEC 60812	2006	Analysis techniques for system reliability - Procedure for failure mode and effects analysis (FMEA)	EN 60812	2006
IEC 61000-4-1	2006 ¹⁾	Electromagnetic compatibility (EMC) - Part 4-1: Testing and measurement techniques - Overview of IEC 61000-4 series	EN 61000-4-1	2007 ²⁾
IEC 61000-4-2	2008	Electromagnetic compatibility (EMC) - Part 4-2: Testing and measurement techniques - Electrostatic discharge immunity test	EN 61000-4-2	2009
IEC 61000-4-3	2006	Electromagnetic compatibility (EMC) - Part 4-3: Testing and measurement techniques - Radiated, radio-frequency, electromagnetic field immunity test	EN 61000-4-3	2006
+A1	2007		+A1	2008
+A2	2010		+A2	2010

¹⁾ Superseded by IEC/TR 61000-4-1:2016.

²⁾ Withdrawn publication.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 61000-4-4	2012	Electromagnetic compatibility (EMC) - Part 4-4: Testing and measurement techniques - Electrical fast transient/burst immunity test	EN 61000-4-4	2012
IEC 61000-4-5	2014	Electromagnetic compatibility (EMC) - Part 4-5: Testing and measurement techniques - Surge immunity test	EN 61000-4-5	2014
IEC 61000-4-6	2013	Electromagnetic compatibility (EMC) - Part 4-6: Testing and measurement techniques - Immunity to conducted disturbances, induced by radio-frequency fields	EN 61000-4-6	2014
IEC 61000-4-7	2002	Electromagnetic compatibility (EMC) - Part 4-7: Testing and measurement techniques - General guide on harmonics and interharmonics measurements and instrumentation, for power supply systems and equipment connected thereto	EN 61000-4-7	2002
+A1	2008		+A1	2009
IEC 61000-4-8	2009	Electromagnetic compatibility (EMC) - Part 4-8: Testing and measurement techniques - Power frequency magnetic field immunity test	EN 61000-4-8	2010
IEC 61000-4-9	1993	Electromagnetic compatibility (EMC) - Part 4-9: Testing and measurement techniques - Pulse magnetic field immunity test	EN 61000-4-9	1993 ³⁾
+A1	2000		+A1	2001 ³⁾
IEC 61000-4-10	1993 ⁴⁾	Electromagnetic compatibility (EMC) - Part 4-10: Testing and measurement techniques - Damped oscillatory magnetic field immunity test	EN 61000-4-10	1993
+A1	2000		+A1	2001
IEC 61000-4-11	2004	Electromagnetic compatibility (EMC) - Part 4-11: Testing and measurement techniques - Voltage dips, short interruptions and voltage variations immunity tests	EN 61000-4-11	2004
IEC 61000-4-13	2002	Electromagnetic compatibility (EMC) - Part 4-13: Testing and measurement techniques - Harmonics and interharmonics including mains signaling at a.c. power port, low frequency immunity tests	EN 61000-4-13	2002
+A1	2009		+A1	2009

³⁾ Superseded by EN 61000-4-9:2016 (IEC 61000-4-9:2016): DOW = 2019-08-17.

⁴⁾ Superseded by IEC 61000-4-10:2016.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 61000-4-16	1998	Electromagnetic compatibility (EMC) - Part 4-16: Testing and measurement techniques - Test for immunity to conducted, common mode disturbances in the frequency range 0 Hz to 150 kHz	EN 61000-4-16	1998 ⁵⁾
+A1	2001		+A1	2004
+A2	2009		+A2	2011
IEC 61000-4-18	2006	Electromagnetic compatibility (EMC) - Part 4-18: Testing and measurement techniques - Damped oscillatory wave immunity test	EN 61000-4-18 + corr. September	2007 2007
+A1	2010		+A1	2010
IEC 61000-4-29	2000	Electromagnetic compatibility (EMC) - Part 4-29: Testing and measurement techniques - Voltage dips, short interruptions and voltage variations on d.c. input power port immunity tests	EN 61000-4-29	2000
IEC 61025	2006	Fault Tree Analysis (FTA)	EN 61025	2007
IEC 61076-2-101	2012	Connectors for electronic equipment - Product requirements - Part 2-101: Circular connectors - Detail specification for M12 connectors with screw-locking	EN 61076-2-101	2012
IEC/TS 61850-2	2003	Communication networks and systems in substations - Part 2: Glossary	-	-
IEC 61850-7-4	2010	Communication networks and systems for power utility automation - Part 7-4: Basic communication structure - Compatible logical node classes and data object classes	EN 61850-7-4	2010
IEC 61869-1 (mod)	2007	Instrument transformers - Part 1: General requirements	EN 61869-1	2009
IEC 61869-2	2012	Instrument transformers - Part 2: Additional requirements for current transformers	EN 61869-2	2012
IEC 61869-3	2011	Instrument transformers - Part 3: Additional requirements for inductive voltage transformers	EN 61869-3	2011
IEC/TR 61869-103	2012	Instrument transformers - The use of instrument transformers for power quality measurement	-	-
IEC 62271-100	2008	High-voltage switchgear and controlgear - Part 100: Alternating current circuit-breakers	EN 62271-100	2009
+A1	2012		+A1	2012
CISPR 11 (mod)	2015	Industrial, scientific and medical equipment - Radio-frequency disturbance characteristics - Limits and methods of measurement	EN 55011	2016

⁵⁾ Superseded by EN 61000-4-16:2016 (IEC 61000-4-16:2015): DOW = 2019-01-13.

EN 61869-6:2016

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
ISO/IEC/IEEE 21451-4	2010	Information technology - Smart transducer - interface for sensors and actuators - Part 4: Mixed-mode communication protocols and Transducer Electronic Data Sheet (TEDS) formats		-

CONTENTS

FOREWORD.....	6
1 Scope.....	10
2 Normative reference	10
3 Terms and definitions	13
3.1 General terms and definitions	13
3.2 Terms and definitions related to dielectric ratings and voltages.....	17
3.3 Terms and definitions related to current ratings	17
3.4 Terms and definitions related to accuracy	21
3.5 Terms and definitions related to other ratings	26
3.7 Index of abbreviations and symbols	26
4 Normal and special service conditions.....	28
4.2 Normal service conditions	28
4.2.3 Vibrations or earth tremors	28
4.2.601 Partially outdoor LPIT	28
5 Ratings.....	28
5.3 Rated insulation levels and voltages	28
5.3.5 Insulation requirements for secondary terminals	28
5.3.601 Rated auxiliary power supply voltage (U_{ar})	28
5.4 Rated frequency.....	29
5.5 Rated output	29
5.5.601 Rated burden (R_{br})	29
5.5.602 Standard values for the rated delay time (t_{dr})	29
5.6 Rated accuracy class	30
6 Design and construction	30
6.7 Mechanical requirements.....	30
6.11 Electromagnetic compatibility (EMC).....	30
6.11.3 Requirements for immunity	30
6.11.4 Requirement for transmitted overvoltages.....	32
6.11.601 Emission requirements	32
6.13 Markings	33
6.601 Requirements for optical transmitting system and optical output link.....	33
6.601.1 General	33
6.601.2 Optical connectors	33
6.601.3 Fibre optic terminal box.....	33
6.601.4 Total cable length	33
6.602 Requirements for electrical transmitting system and electrical wires for output link	33
6.602.1 Connectors	33
6.602.2 Earthing of the output cable.....	34
6.603 Signal-to-noise ratio	34
6.604 Failure detection and maintenance announcement	35
6.605 Operability	35
6.606 Reliability and dependability	35
6.607 Vibrations	35
7 Tests.....	36
7.1 General.....	36

7.1.2	List of tests	36
7.2	Type tests	37
7.2.1	General	37
7.2.2	Temperature-rise test.....	37
7.2.3	Impulse voltage withstand test on primary terminals.....	37
7.2.5	Electromagnetic compatibility (EMC) tests	37
7.2.6	Test for accuracy	41
7.2.601	Low-voltage component voltage withstand test	43
7.3	Routine tests.....	44
7.3.1	Power-frequency voltage withstand tests on primary terminals	44
7.3.4	Power-frequency voltage withstand tests on secondary terminals	45
7.3.5	Test for accuracy	45
7.3.601	Power-frequency voltage withstand test for low-voltage components	45
7.4	Special tests	45
7.4.601	Vibration tests.....	45
601	Information to be given with enquiries, tenders and orders.....	46
601.1	Designation.....	46
601.2	Dependability	46
Annex 6A (normative)	LPIT frequency response and accuracy requirements for harmonics.....	47
6A.1	General.....	47
6A.2	Requirements for noise and distortion.....	47
6A.3	Anti-aliasing filter requirements for LPIT using digital data processing.....	47
6A.4	LPIT accuracy requirements for harmonics and low frequencies	49
6A.4.1	General	49
6A.4.2	Measuring accuracy classes.....	49
6A.4.3	Accuracy class extension for quality metering and low bandwidth d.c. applications	50
6A.4.4	Protective accuracy classes	51
6A.4.5	Special high bandwidth protection accuracy class	51
6A.4.6	Special accuracy classes for d.c. coupled low-power voltage transformers	52
6A.5	Tests for accuracy versus harmonics and low frequencies.....	52
6A.6	Test arrangement and test circuit.....	53
6A.6.1	Test for accuracy for harmonics and low frequencies	53
6A.6.2	Type test for proper anti-aliasing	53
Annex 6B (informative)	Transient performances of low-power current transformers	55
6B.1	General.....	55
6B.2	Short-circuit currents in power systems.....	55
6B.3	Conventional current transformer equivalent circuit.....	58
6B.4	Types of current transformers.....	60
6B.4.1	Types of conventional CTs	60
6B.4.2	Types of low-power current transformers	61
6B.5	Transient performance of current transformers.....	62
6B.5.1	Transient performance of conventional current transformers	62
6B.5.2	Transient performance of low-power current transformers	63
6B.6	Summary	64
Annex 6C (informative)	Transient performances of low-power voltage transformers.....	65
6C.1	Overview	65

6C.2	General.....	65
6C.2.1	Defining primary and secondary voltages.....	65
6C.2.2	Normal service conditions of the network.....	65
6C.2.3	Abnormal service conditions of the network	66
6C.2.4	Rated secondary voltages	66
6C.2.5	Steady-state conditions	66
6C.3	Transient conditions	66
6C.3.1	Theoretical considerations	66
6C.3.2	Definition of transient error.....	73
6C.3.3	Test of transient performance.....	73
Annex 6D	(informative) Test circuits.....	78
6D.1	Test circuits for accuracy measurements in steady state for low-power current transformers.....	78
6D.2	Test circuits for accuracy measurements in steady state for low-power voltage transformers	81
Annex 6E	(informative) Graph explaining the accuracy requirements for multi-purpose low-power current transformer.....	84
Bibliography	85
Figure 601	– General block diagram of a single-phase LPIT.....	10
Figure 602	– Primary time constant T_p	19
Figure 603	– Duty cycles, single energization	20
Figure 604	– Duty cycles, double energization.....	21
Figure 605	– Examples of subassembly subjected to EMC tests – Usual structure used in HV AIS applications	38
Figure 606	– Examples of subassembly subjected to EMC tests – Usual structure used in MV applications	39
Figure 607	– Examples of subassembly subjected to EMC tests – Usual structure used in HV GIS applications	39
Figure 608	– Temperature cycle accuracy test.....	42
Figure 6A.1	– Digital data acquisition system example.....	48
Figure 6A.2	– Frequency response mask for metering accuracy class 1 ($f_r = 60 \text{ Hz}$, $f_s =$ 4 800 Hz)	49
Figure 6B.1	– Illustration of a fault in a power system	56
Figure 6B.2	– Short-circuit current a.c. and d.c. components	56
Figure 6B.3	– Symmetric fault current	57
Figure 6B.4	– Asymmetric fault current.....	57
Figure 6B.5	– Equivalent electrical circuit of a conventional CT.....	58
Figure 6B.6	– Flux-current characteristic for a conventional CT without remanence representation	59
Figure 6B.7	– Representation of hysteresis and remanent flux for a conventional CT	60
Figure 6B.8	– Comparison of flux-current characteristics for gapped and gapless CTs.....	62
Figure 6B.9	– Secondary current distorted due to the CT saturation	63
Figure 6B.10	– AC component for non-saturated and saturated CT	63
Figure 6C.1	– Schematic diagram explaining the trapped charge phenomena.....	69
Figure 6C.2	– Voltages during trapped charges phenomena	70
Figure 6C.3	– Modelization example of a simplified low-power voltage transformer.....	72

Figure 6C.4 – Testing arrangement for short time constant	76
Figure 6C.5 – Testing arrangement for long time constant	77
Figure 6C.6 – Typical waveform of $e(t)$ during test	77
Figure 6D.1 – Test circuit for analogue accuracy measurements in steady state.....	78
Figure 6D.2 – Test circuit for analogue accuracy measurements in steady state (alternative solution)	79
Figure 6D.3 – Test circuit for digital accuracy measurements in steady state.....	80
Figure 6D.4 – Test circuit for analogue accuracy measurements in steady state.....	81
Figure 6D.5 – Test circuit for analogue accuracy measurements in steady state (alternative solution)	82
Figure 6D.6 – Test circuit for digital accuracy measurements in steady state.....	83
Figure 6E.1 – Accuracy limits of a multi-purpose low-power current transformer	84
Table 601 – Secondary terminal and low voltage component withstand capability.....	28
Table 602 – Immunity requirements and tests.....	30
Table 603 – Connectors.....	34
Table 10 – List of tests.....	36
Table 6A.1 – Anti-aliasing filter	48
Table 6A.2 – Measuring accuracy classes	50
Table 6A.3 – Accuracy classes extension for quality metering and low bandwidth d.c. applications	50
Table 6A.4 – Accuracy classes extension for high bandwidth d.c. applications	51
Table 6A.5 – Protective accuracy classes.....	51
Table 6A.6 – Accuracy classes for special high bandwidth protection	52
Table 6A.7 – Accuracy classes for special d.c. coupled low-power voltage transformers.....	52
Table 6A.8 – Accuracy classes for harmonics	53
Table 6B.1 – Protective CTs	61
Table 6C.1 – Primary short circuit	71
Table 6C.2 – Trapped charges	71
Table 6C.3 – Limits of instantaneous voltage error for protective electronic voltage transformers in case of trapped charges reclose.....	71

INTERNATIONAL ELECTROTECHNICAL COMMISSION

INSTRUMENT TRANSFORMERS –**Part 6: Additional general requirements
for low-power instrument transformers**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61869-6 has been prepared by IEC technical committee 38: Instrument transformers.

This first edition of IEC 61869-6 cancels and replaces the relevant parts of IEC 60044-7, published in 1999, and of IEC 60044-8, published in 2002¹.

¹ IEC 60044-7 and IEC 60044-8 will eventually be replaced by the IEC 61869 series, but until all the relevant parts will be published, these two standards are still in force.

The text of this standard is based on the following documents:

FDIS	Report on voting
38/501/FDIS	38/507/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 61869 series, published under the general title *Instrument transformers*, can be found on the IEC website.

This Part 6 is to be read in conjunction with, and is based on, IEC 61869-1:2007, *General Requirements* – however, the reader is encouraged to use its most recent edition.

This Part 6 follows the structure of IEC 61869-1:2007 and supplements or modifies its corresponding clauses.

When a particular clause/subclause of Part 1 is not mentioned in this Part 6, that clause/subclause applies. When this standard states “addition”, “modification” or “replacement”, the relevant text in Part 1 is to be adapted accordingly.

For additional clauses, subclauses, figures, tables, annexes or notes, the following numbering system is used:

- clauses, subclauses, tables, figures and notes that are numbered starting from 601 are additional to those in Part 1;
- additional annexes are lettered 6A, 6B, etc.

An overview of the planned set of standards at the date of publication of this document is given below. The updated list of standards issued by IEC TC 38 is available at the website: www.iec.ch.

PRODUCT FAMILY STANDARDS		PRODUCT STANDARD IEC	PRODUCTS	OLD STANDARD IEC
IEC 61869-1 GENERAL REQUIREMENTS FOR INSTRUMENT TRANSFORMERS		61869-2	ADDITIONAL REQUIREMENTS FOR CURRENT TRANSFORMERS	60044-1 60044-6
		61869-3	ADDITIONAL REQUIREMENTS FOR INDUCTIVE VOLTAGE TRANSFORMERS	60044-2
		61869-4	ADDITIONAL REQUIREMENTS FOR COMBINED TRANSFORMERS	60044-3
		61869-5	ADDITIONAL REQUIREMENTS FOR CAPACITOR VOLTAGE TRANSFORMERS	60044-5
	IEC 61869-6 ADDITIONAL GENERAL REQUIREMENTS FOR LOW-POWER INSTRUMENT TRANSFORMERS	61869-7	ADDITIONAL REQUIREMENTS FOR ELECTRONIC VOLTAGE TRANSFORMERS	60044-7
		61869-8	ADDITIONAL REQUIREMENTS FOR ELECTRONIC CURRENT TRANSFORMERS	60044-8
		61869-9	DIGITAL INTERFACE FOR INSTRUMENT TRANSFORMERS	
		61869-10	ADDITIONAL REQUIREMENTS FOR LOW-POWER PASSIVE CURRENT TRANSFORMERS	
		61869-11	ADDITIONAL REQUIREMENTS FOR LOW-POWER PASSIVE VOLTAGE TRANSFORMERS	60044-7
		61869-12	ADDITIONAL REQUIREMENTS FOR COMBINED ELECTRONIC INSTRUMENT TRANSFORMER OR COMBINED PASSIVE TRANSFORMERS	
		61869-13	STAND ALONE MERGING UNIT	
		61869-14	ADDITIONAL REQUIREMENTS FOR CURRENT TRANSFORMERS FOR DC APPLICATIONS	
		61869-15	ADDITIONAL REQUIREMENTS FOR DC VOLTAGE TRANSFORMERS FOR DC APPLICATIONS	

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INSTRUMENT TRANSFORMERS –

Part 6: Additional general requirements for low-power instrument transformers

1 Scope

This part of IEC 61869 is a product family standard and covers only additional general requirements for low-power instrument transformers (LPIT) used for a.c. applications having rated frequencies from 15 Hz to 100 Hz covering MV, HV and EHV or used for d.c. applications. This product standard is based on IEC 61869-1:2007, in addition to the relevant product specific standard.

This part of IEC 61869 does not cover the specification for the digital output format of instrument transformers.


This part of IEC 61869 defines the errors in case of analogue or digital output. The other characteristics of the digital interface for instrument transformers are standardised in IEC 61869-9 as an application of the standards, the IEC 61850 series, which details layered substation communication architecture.

This part of IEC 61869 considers additional requirements concerning bandwidth. The accuracy requirements on harmonics and requirements for the anti-aliasing filter are given in the normative Annex 6A.4.

The general block diagram of single-phase LPITs is given in Figure 601.

According to the technology, it is not absolutely necessary that all parts described in Figure 601 are included in the instrument transformer.

As an example, for low-power passive transformers (LPITs without active electronic components) the blocks are composed only with passive components and there is no power supply.

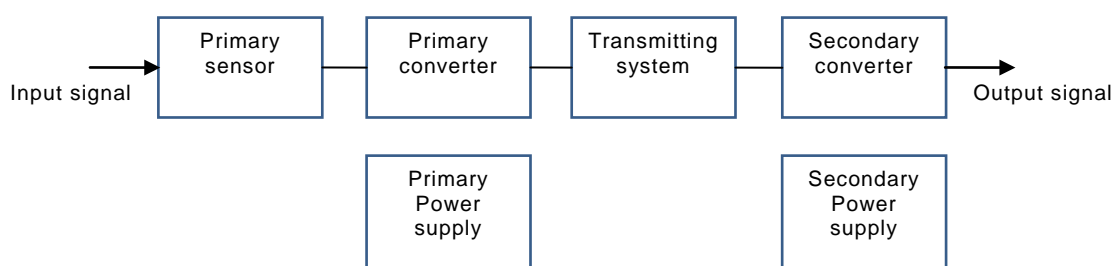

IEC

Figure 601 – General block diagram of a single-phase LPIT

2 Normative reference

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

Clause 2 of IEC 61869-1:2007 is applicable with the following additions:

IEC 60068-2-6:2007, *Environmental testing – Part 2-6: Tests – Test Fc: Vibration (sinusoidal)*

IEC 60255-27:2013, *Measuring relays and protection equipment – Part 27: Product safety requirements*

IEC 60603-7-1:2011, *Connectors for electronic equipment – Part 7-1: Detail specification for 8-way, shielded, free and fixed connectors*

IEC 60794-2:2002, *Optical fibre cables – Part 2: Indoor cables – Sectional specification*

IEC 60794-3:2014, *Optical fibre cables – Part 3: Outdoor cables – Sectional specification*

IEC 60812:2006, *Analysis techniques for system reliability – Procedure for failure mode and effects analysis (FMEA)*

IEC 61000-4-1:2006, *Electromagnetic compatibility (EMC) – Part 4-1: Testing and measurement techniques – Overview of IEC 61000-4 series*

IEC 61000-4-2:2008, *Electromagnetic compatibility (EMC) – Part 4-2: Testing and measurement techniques – Electrostatic discharge immunity test*

IEC 61000-4-3:2006, *Electromagnetic compatibility (EMC) – Part 4-3: Testing and measurement techniques – Radiated, radio-frequency, electromagnetic field immunity test*
IEC 61000-4-3:2006/AMD1:2007
IEC 61000-4-3:2006/AMD2:2010

IEC 61000-4-4:2012, *Electromagnetic compatibility (EMC) – Part 4-4: Testing and measurement techniques – Electrical fast transient/burst immunity test*

IEC 61000-4-5:2014, *Electromagnetic compatibility (EMC) – Part 4-5: Testing and measurement techniques – Surge immunity test*

IEC 61000-4-6:2013, *Electromagnetic compatibility (EMC) – Part 4-6: Testing and measurement techniques – Immunity to conducted disturbances, induced by radio-frequency fields*

IEC 61000-4-7:2002, *Electromagnetic compatibility (EMC) – Part 4-7: Testing and measurement techniques – General guide on harmonics and interharmonics measurements and instrumentation, for power supply systems and equipment connected thereto*
IEC 61000-4-7:2002/AMD1:2008

IEC 61000-4-8:2009, *Electromagnetic compatibility (EMC) – Part 4-8: Testing and measurement techniques – Power frequency magnetic field immunity test*

IEC 61000-4-9:1993, *Electromagnetic compatibility (EMC) – Part 4-9: Testing and measurement techniques – Section 9: Pulse magnetic field immunity test*
IEC 61000-4-9:1993/AMD1:2000

IEC 61000-4-10:1993, *Electromagnetic compatibility (EMC) – Part 4-10: Testing and measurement techniques – Section 10: Damped oscillatory magnetic field immunity test. Basic EMC Publication*
IEC 61000-4-10:1993/AMD1:2000

IEC 61000-4-11:2004, *Electromagnetic compatibility (EMC) – Part 4-11: Testing and measurement techniques – Voltage dips, short interruptions and voltage variations immunity tests*

IEC 61000-4-13:2002, *Electromagnetic compatibility (EMC) – Part 4-13: Testing and measurement techniques – Harmonics and interharmonics including mains signalling at a.c. power port, low frequency immunity tests*
IEC 61000-4-13:2002/AMD1:2009

IEC 61000-4-16:1998, *Electromagnetic compatibility (EMC) – Part 4-16: Testing and measurement techniques – Test for immunity to conducted, common mode disturbances in the frequency range 0 Hz to 150 kHz*
IEC 61000-4-16:1998/AMD1:2001
IEC 61000-4-16:1998/AMD2:2009

IEC 61000-4-18:2006, *Electromagnetic compatibility (EMC) – Part 4-18: Testing and measurement techniques – Damped oscillatory wave immunity test*
IEC 61000-4-18:2006/AMD1:2010

IEC 61000-4-29:2000, *Electromagnetic compatibility (EMC) – Part 4-29: Testing and measurement techniques – Voltage dips, short interruptions and voltage variations on d.c. input power port immunity tests*

IEC 61025:2006, *Fault tree analysis (FTA)*

IEC 61076-2-101:2012, *Connectors for electronic equipment – Product requirements – Part 2-101: Circular connectors – Detail specification for M12 connectors with screw-locking*

IEC TS 61850-2:2003, *Communication networks and systems in substations – Part 2: Glossary*

IEC 61850-7-4:2010, *Communication networks and systems for power utility automation – Part 7-4: Basic communication structure – Compatible logical node classes and data object classes*

IEC 61869-1:2007, *Instrument transformers – Part 1: General requirements*

IEC 61869-2:2012, *Instrument transformers – Part 2: Additional requirements for current transformers*

IEC 61869-3:2011, *Instrument transformers – Part 3: Additional requirements for inductive voltage transformers*

IEC TR 61869-103:2012, *Instrument transformers – Part 103: The use of instrument transformers for power quality measurement*

IEC 62271-100:2008, *High-voltage switchgear and controlgear – Part 100: Alternating current circuit-breakers*
IEC 62271-100:2008/AMD1:2012

CISPR 11:2015, *Industrial, scientific and medical equipment – Radio-frequency disturbance characteristics – Limits and methods of measurement*

ISO/IEC/IEEE 21451-4:2010, *Information technology – Smart transducer interface for sensors and actuators – Part 4: Mixed-mode communication protocols and Transducer Electronic Data Sheet (TEDS) formats*

EN 50160:2010, *Voltage characteristics of electricity supplied by public distribution systems*