

© Copyright SEK. Reproduction in any form without permission is prohibited.

Elektronisk utrustning för järnvägar – Kommunikationsnätverk för tåg (TCN) – Del 2-1: Wire Train Bus (WTB)

*Electric railway equipment –
Train communication network (TCN) –
Part 2-1: Wire Train Bus (WTB)*

Som svensk standard gäller europastandarden EN 61375-2-1:2012. Den svenska standarden innehåller den officiella engelska språkversionen av EN 61375-2-1:2012.

Nationellt förord

Europastandarden EN 61375-2-1:2012

består av:

- **europastandardens ikraftsättningsdokument**, utarbetat inom CENELEC
- **IEC 61375-2-1, First edition, 2012 - Electric railway equipment - Train communication network (TCN) - Part 2-1: Wire Train Bus (WTB)**

utarbetad inom International Electrotechnical Commission, IEC.

ICS 45.060

Standarder underlättar utvecklingen och höjer elsäkerheten

Det finns många fördelar med att ha gemensamma tekniska regler för bl a säkerhet, prestanda, dokumentation, utförande och skötsel av elprodukter, elanläggningar och metoder. Genom att utforma sådana standarder blir säkerhetskraven tydliga och utvecklingskostnaderna rimliga samtidigt som marknadens acceptans för produkten eller tjänsten ökar.

Många standarder inom elområdet beskriver tekniska lösningar och metoder som åstadkommer den elsäkerhet som föreskrivs av svenska myndigheter och av EU.

SEK är Sveriges röst i standardiseringssarbetet inom elområdet

SEK Svensk Elstandard svarar för standardiseringen inom elområdet i Sverige och samordnar svensk medverkan i internationell och europeisk standardisering. SEK är en ideell organisation med frivilligt deltagande från svenska myndigheter, företag och organisationer som vill medverka till och påverka utformningen av tekniska regler inom elektrotekniken.

SEK samordnar svenska intressenters medverkan i SEKs tekniska kommittéer och stödjer svenska experters medverkan i internationella och europeiska projekt.

Stora delar av arbetet sker internationellt

Utdriften av standarder sker i allt väsentligt i internationellt och europeiskt samarbete. SEK är svensk nationalkommitté av International Electrotechnical Commission (IEC) och Comité Européen de Normalisation Electrotechnique (CENELEC).

Standardiseringssarbetet inom SEK är organiserat i referensgrupper bestående av ett antal tekniska kommittéer som speglar hur arbetet inom IEC och CENELEC är organiserat.

Arbetet i de tekniska kommittéerna är öppet för alla svenska organisationer, företag, institutioner, myndigheter och statliga verk. Den årliga avgiften för deltagandet och intäkter från försäljning finansierar SEKs standardiseringssverksamhet och medlemsavgift till IEC och CENELEC.

Var med och påverka!

Den som deltar i SEKs tekniska kommittéarbete har möjlighet att påverka framtidens standarder och får tidig tillgång till information och dokumentation om utvecklingen inom sitt teknikområde. Arbetet och kontakterna med kollegor, kunder och konkurrenter kan gynnsamt påverka enskilda företags affärsutveckling och bidrar till deltagarnas egen kompetensutveckling.

Du som vill dra nytta av dessa möjligheter är välkommen att kontakta SEKs kansli för mer information.

SEK Svensk Elstandard

Box 1284
164 29 Kista
Tel 08-444 14 00
www.elstandard.se

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 61375-2-1

August 2012

ICS 45.060

English version

**Electronic railway equipment -
Train communication network (TCN) -
Part 2-1: Wire Train Bus (WTB)
(IEC 61375-2-1:2012)**

Matériel électronique ferroviaire -
Réseau embarqué de train (TCN) -
Partie 2-1: Bus de Train Filaire (WTB)
(CEI 61375-2-1:2012)

Elektronische Betriebsmittel für Bahnen -
Zug-Kommunikations-Netzwerk -
Teil 2-1: WTB - Wire Train Bus
Konformitätsprüfung
(IEC 61375-2-1:2012)

This European Standard was approved by CENELEC on 2012-07-26. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Management Centre: Avenue Marnix 17, B - 1000 Brussels

Foreword

The text of document 9/1642/FDIS, future edition 1 of IEC 61375-2-1, prepared by IEC/TC 9 "Electrical equipment and systems for railways" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 61375-2-1:2012.

The following dates are fixed:

- latest date by which the document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2013-04-26
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2015-07-26

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

This document has been prepared under a mandate given to CENELEC by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive(s).

For the relationship with EU Directive(s) see informative Annex ZZ, which is an integral part of this document.

Endorsement notice

The text of the International Standard IEC 61375-2-1:2012 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following note has to be added for the standard indicated:

IEC 60870-5-1 NOTE Harmonized as EN 60870-5-1.

Annex ZA

(normative)

Normative references to international publications with their corresponding European publications

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE When an international publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60571	-	Electronic equipment used on rail vehicles	-	-
IEC 60807	Series	Rectangular connectors for frequencies below 3 MHz	-	-
IEC 61375-1	-	Electronic railway equipment - Train communication network - Part 1: TCN - Train Communication Network general architecture	EN 61375-1	-
IEC 61375-2-2	2012	Electronic railway equipment - Train communication network (TCN) - Part 2-2: Wire Train Bus conformance testing	EN 61375-2-2	2012
IEC 61375-3-1	-	Electronic railway equipment - Train communication network (TCN) - Part 3-1: Multifunction Vehicle Bus (MVB)	EN 61375-3-1	-
ISO/IEC 8802-2	-	Information technology - Telecommunications - and information exchange between systems - Local and metropolitan area networks - Specific requirements - Part 2: Logical link control	-	-
ISO/IEC 8824	Series	Information technology - Abstract Syntax Notation One (ASN.1)	-	-
ISO/IEC 8825	Series	Information technology - ASN.1 encoding rules	-	-
ISO/IEC 8859-1	-	Information technology - 8-bit single-byte coded graphic character sets - Part 1: Latin alphabet No.1	-	-
ISO/IEC 9646	Series	Information technology - Open Systems Interconnection - Conformance testing methodology and framework	-	-
ISO/IEC 10646	-	Information technology - Universal multiple-octet coded character set (UCS)	-	-
ISO/IEC 13239	-	Information technology - Telecommunications - and information exchange between systems - High-level data link control (HDLC) procedures	-	-
ITU-T Recommendation V.24	-	List of definitions for interchange circuits between data terminal equipment (DTE) and data circuit-terminating equipment (DCE)	-	-
ITU-T Recommendation Z.100	-	Specification and Description Language (SDL)-	-	-

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEEE 754	-	Binary floating-point arithmetic	-	-
UIC CODE 556	-	Information transmission in the train (train-bus)	-	-
UIC CODE 557	-	Diagnostics on passenger rolling stock	-	-

CONTENTS

INTRODUCTION	13
1 Scope	15
2 Normative references	15
3 Terms and definitions, abbreviations, conventions	16
3.1 Terms and definitions	16
3.2 Abbreviations	32
3.3 Conventions	34
3.3.1 Base of numeric values	34
3.3.2 Naming conventions	34
3.3.3 Time naming conventions	34
3.3.4 Procedural interface conventions	35
3.3.5 Specification of transmitted data	37
3.3.6 State diagram conventions	39
3.4 General considerations	40
3.4.1 Interface between equipment	40
3.4.2 Interface between consists	40
3.4.3 Real-Time Protocols	40
3.4.4 Network Management	41
3.4.5 Configurations	41
3.4.6 Structure of a standard device	42
3.5 Conformance test	45
4 Physical layer	46
4.1 Topology	46
4.1.1 Bus sections	46
4.1.2 Couplers	46
4.1.3 Nodes	46
4.1.4 Consist orientation	46
4.1.5 Consist specification (informal)	47
4.2 Medium specifications	48
4.2.1 Topology	48
4.2.2 Duplicated medium (option)	48
4.2.3 Bus Configuration rules	49
4.2.4 Cable specification	50
4.2.5 Shielding concept	51
4.2.6 Terminator	52
4.3 Medium attachment	53
4.3.1 Node connection points identification	53
4.3.2 Direct node attachment	53
4.3.3 Indirect node attachment	54
4.3.4 Connector (optional)	54
4.4 Node specifications	55
4.4.1 Node elements	55
4.4.2 Node and switch settings	57
4.4.3 Duplicated Line Units (option)	57
4.5 Line Unit specifications	58

4.5.1	Galvanic separation	58
4.5.2	Insertion losses of a Line Unit	58
4.5.3	Switches specifications	59
4.5.4	Shield connection to a Line Unit	59
4.5.5	Fritting (option)	60
4.6	Transceiver specifications.....	61
4.6.1	Conventions.....	61
4.6.2	Transmitter	61
4.6.3	Receiver specifications	64
4.7	Medium-dependent signalling.....	66
4.7.1	Frame encoding and decoding	66
4.7.2	Duplicated line handling (option)	69
4.7.3	Line Unit interface.....	71
5	Link Layer Control.....	72
5.1	Addressing	72
5.2	Frames and telegrams	73
5.2.1	Frame_Data format.....	73
5.2.2	Telegram timing	74
5.2.3	Elements of the HDLC Frame.....	76
5.2.4	Link Control Field.....	77
5.2.5	Handling of 'Attention', 'Change' and 'Inhibit'	80
5.2.6	Size, FCS and protocol errors	80
5.3	Telegram formats and protocols.....	80
5.3.1	Link Data field.....	80
5.3.2	Process Data	81
5.3.3	Message Data.....	83
5.3.4	Supervisory Data	84
5.3.5	Detection telegram	85
5.3.6	Presence telegram	87
5.3.7	Status telegram	88
5.3.8	Set to Intermediate telegram	90
5.3.9	Naming telegram	91
5.3.10	Unname telegram	93
5.3.11	Set to End telegram	93
5.3.12	Topography telegram	95
5.4	Medium allocation.....	97
5.4.1	Organisation	97
5.4.2	Periodic Phase	98
5.4.3	Sporadic phase.....	99
5.5	Inauguration	99
5.5.1	General	99
5.5.2	Descriptors	101
5.5.3	Detection of other compositions (informal)	105
5.5.4	State diagrams of the inauguration	108
5.6	Link layer interface	148
5.6.1	Link layer layering	148
5.6.2	Link Process_Data_Interface	149
5.6.3	Link Message_Data_Interface	150
5.6.4	Link management interface	150

6	Real-Time protocols	161
6.1	General	161
6.1.1	Contents of this clause	161
6.1.2	Structure of this clause	162
6.2	Variables – Services and Protocols	163
6.2.1	General	163
6.2.2	Link layer Interface for Process_Data	163
6.2.3	Application interface for Process_Variables	169
6.3	Messages Services and Protocols	184
6.3.1	General	184
6.3.2	Reference station	184
6.3.3	Message packets handling	187
6.3.4	Message Link layer	189
6.3.5	Message Network Layer	199
6.3.6	Message transport layer	211
6.3.7	Multicast Transport Protocol (option)	242
6.3.8	Message session layer	258
6.3.9	Message Presentation Layer	260
6.3.10	Message Application layer	260
6.4	Presentation and encoding of transmitted and stored data	281
6.4.1	Purpose	281
6.4.2	Data ordering	282
6.4.3	Notation for the primitive types	283
6.4.4	Structured types	290
6.4.5	Alignment	299
6.4.6	Notation for special types	299
7	Application Layer	301
7.1	Process Data Marshalling	301
7.1.1	Marshalling Types	301
7.1.2	Marshalling Modes	301
7.1.3	Data Paths in PDM	302
7.1.4	PDM Operation	303
7.1.5	PDM Functions	304
7.2	WTB Line Fault Location Detection	306
7.2.1	Architecture	307
7.2.2	Protocol Overview	308
7.2.3	LFLD Sequence	309
7.2.4	End Node State Machine (Testing Node)	311
7.2.5	Intermediate Node State Machine (Segmenting Node)	311
7.2.6	Disturbed Line selection	311
7.2.7	Location Detection	311
8	Train Network Management	313
8.1	General	313
8.1.1	Contents of this clause	313
8.1.2	Structure of this clause	314
8.2	Manager, Agents and interfaces	314
8.2.1	Manager and Agent	314
8.2.2	Management messages protocol	314
8.2.3	Interfaces	315

8.3	Managed objects	317
8.3.1	Object Attributes	317
8.3.2	Station objects	317
8.3.3	WTB link objects.....	320
8.3.4	Variable objects	321
8.3.5	Messenger objects.....	323
8.3.6	Domain objects	324
8.3.7	Task objects	324
8.3.8	Clock object.....	325
8.3.9	Journal object	325
8.3.10	Equipment object.....	326
8.4	Services and management messages	326
8.4.1	Notation for all management messages.....	326
8.4.2	Station services	331
8.4.3	WTB link services	338
8.4.4	Variables services.....	350
8.4.5	Messages services	360
8.4.6	Domain services	369
8.4.7	Task services	374
8.4.8	Clock services	376
8.4.9	Journal Service.....	377
8.4.10	Equipment Service	379
8.5	Interface Procedures	380
8.5.1	Manager interface (MGI)	380
8.5.2	Agent interface	381
	Bibliography	384
	Figure 1 – Wire Train Bus	13
	Figure 2 – Layering of the TCN.....	14
	Figure 3 – State transition example	39
	Figure 4 – Interfaces between equipment	40
	Figure 5 – Interfaces between consists.....	40
	Figure 6 – Train Bus and Consist network	41
	Figure 7 – TCN configurations	42
	Figure 8 – TCN WTB device configuration options	43
	Figure 9 – Train Composition (two Intermediate Nodes shown)	46
	Figure 10 – Vehicle measurement	47
	Figure 11 – Connected nodes in regular operation	48
	Figure 12 – Double-line attachment	49
	Figure 13 – Grounded shield concept	52
	Figure 14 – Floating shield concept	52
	Figure 15 – Terminator.....	53
	Figure 16 – Direct node attachment (optional double-line).....	53
	Figure 17 – Indirect attachment	54
	Figure 18 – WTB connector, front view	55
	Figure 19 – Example of MAU Structure.....	56

Figure 20 – Node with redundant Line Units.....	58
Figure 21 – Attenuation measurement	59
Figure 22 – Shield grounding in the Line Unit.....	60
Figure 23 – Fritting source and load	60
Figure 24 – Transmitter fixtures.....	62
Figure 25 – Pulse wave form at transmitter.....	63
Figure 26 – Signal and idling at transmitter.....	64
Figure 27 – Receiver signal envelope	65
Figure 28 – Receiver edge distortion	66
Figure 29 – Idealised frame on the line (16 bit Preamble shown).....	67
Figure 30 – Bit encoding.....	67
Figure 31 – Preamble.....	67
Figure 32 – End Delimiter.....	68
Figure 33 – Valid frame, RxS, CS and SQE signals	69
Figure 34 – Garbled frame, RxS, CS, SQE signals.....	69
Figure 35 – Redundant Lines (as seen at a receiver)	70
Figure 36 – Line_Disturbance signals	71
Figure 37 – HDLC Frame structure	73
Figure 38 – Telegram timing.....	74
Figure 39 – Example of Interframe spacing.....	75
Figure 40 – Frame spacing measured at the master side	76
Figure 41 – Frame spacing at the slave	76
Figure 42 – HDLC Data format	77
Figure 43 – Format of HDLC Data	77
Figure 44 – Process Data telegram	81
Figure 45 – Format of Process Data Request	82
Figure 46 – Format of Process Data Response.....	83
Figure 47 – Message Data telegram	83
Figure 48 – Format of Message Data Request.....	83
Figure 49 – Format of Message Data Response	84
Figure 50 – Supervisory telegram	84
Figure 51 – Detection telegram.....	85
Figure 52 – Format of Detect Request	86
Figure 53 – Format of Detect Response	86
Figure 54 – Presence telegram.....	87
Figure 55 – Format of Presence Request	87
Figure 56 – Format of Presence Response	88
Figure 57 – Status telegram	88
Figure 58 – Format of Status Request	89
Figure 59 – Format of Status Response.....	90
Figure 60 – Set-to-Intermediate telegram	90
Figure 61 – Format of SetInt Request.....	90
Figure 62 – Format of SetInt Response	91

Figure 63 – Naming telegram	91
Figure 64 – Format of Naming Request	92
Figure 65 – Format of Naming Response.....	92
Figure 66 – Unnaming telegram.....	93
Figure 67 – Format of Unname Request	93
Figure 68 – Set to End telegram	93
Figure 69 – Format of SetEnd Request.....	94
Figure 70 – Format of SetEnd Response	94
Figure 71 – Topography telegram	95
Figure 72 – Format of Topography Request.....	95
Figure 73 – Format of Topography Response	96
Figure 74 – Structure of the Basic Period	97
Figure 75 – Node position numbering	100
Figure 76 – Format of Node Descriptor.....	101
Figure 77 – Format of Node Report	102
Figure 78 – Format of User Report	102
Figure 79 – Format of Composition Strength.....	103
Figure 80 – Master_Report.....	104
Figure 81 – Format of Topo Counter.....	104
Figure 82 – Format of Master Topo	105
Figure 83 – Timing Diagram of detection protocol.....	107
Figure 84 – Major node states and application settings	108
Figure 85 – Node processes (End Setting).....	109
Figure 86 – AUXILIARY_PROCESS states	115
Figure 87 – NAMING_RESPONSE macro	116
Figure 88 – States of MAIN PROCESS	117
Figure 89 – Macro 'START_NODE'.....	120
Figure 90 – Procedure REQUEST_RESPONSE	122
Figure 91 – Procedures 'SET_TO_INT' and 'SET_TO_END'	123
Figure 92 – Macro 'INIT_MASTER'	124
Figure 93 – Macro 'NAMING_MASTER'	125
Figure 94 – Macro ASK_END	126
Figure 95 – Procedure NAME_ONE	129
Figure 96 – Macro TEACHING_MASTER.....	131
Figure 97 – Macro 'UNNAMING_MASTER'	132
Figure 98 – Macro 'REGULAR_MASTER'	134
Figure 99 – Macro CHECK_DESC	135
Figure 100 – Macro PERIODIC_POLL	137
Figure 101 – Macro MESSAGE_POLL	138
Figure 102 – States 'UNNAMED_SLAVE'	140
Figure 103 – States 'NAMED_SLAVE'	142
Figure 104 – Macro 'LEARNING_SLAVE'	144
Figure 105 – Macro 'REGULAR_SLAVE'	146

Figure 106 – Link layer layering	148
Figure 107 – Structure of the Train Communication Network.....	161
Figure 108 – Real-Time Protocols layering	162
Figure 109 – LPI primitives exchange	166
Figure 110 – Check_Variable	171
Figure 111 – Individual access	175
Figure 112 – Set access.....	179
Figure 113 – Cluster access	182
Figure 114 – Terminal station	184
Figure 115 – Router station between WTB and MVB.....	185
Figure 116 – Gateway station between WTB and Consist network	186
Figure 117 – Packet format	188
Figure 118 – Link layer data transmission.....	190
Figure 119 – Link_Message_Data_Interface (LMI)	191
Figure 120 – Example of MVB Message_Data frame	192
Figure 121 – Example of WTB Message_Data frame	193
Figure 122 – LMI primitives	194
Figure 123 – Network layer on a Node.....	200
Figure 124 – Encoding of the Network_Address.....	203
Figure 125 – Building of the addresses in an outbound packet.....	205
Figure 126 – Network address encoding on the train bus	206
Figure 127 – Transport packet exchange	213
Figure 128 – Packet formats (transport layer body).....	215
Figure 129 – State transition diagram of the MTP	224
Figure 130 – Time-out SEND_TMO	227
Figure 131 – Time-out ALIVE_TMO	228
Figure 132 – Transport interface	236
Figure 133 – Multicast message with no retransmission.....	243
Figure 134 – Short multicast message with no BD packets and no loss	244
Figure 135 – Exchange with lost packets	245
Figure 136 – Packet formats	247
Figure 137 – Protocol machine states.....	248
Figure 138 – Session layer transfer	259
Figure 139 – Session_Header in Call_Message (of type Am_Result).....	260
Figure 140 – Application_Messages_Interface	261
Figure 141 – Encoding of AM_ADDRESS	265
Figure 142 – Process Data Marshalling	301
Figure 143 – PDM Data Paths	302
Figure 144 – PDM Operation	304
Figure 145 – PDM Invalidate Variable or Function result	304
Figure 146 – PDM Operation	306
Figure 147 – PDM Validty check	306
Figure 148 – LFID Architecture	307

Figure 149 – LFLD sequence	309
Figure 150 – End node state machine.....	311
Figure 151 – LFLD process, SN at node 63	312
Figure 152 – LFLD process, SN at node 1	312
Figure 153 – LFLD process, SN at node 1, attachment in direction 1.....	313
Figure 154 – Management messages	315
Figure 155 – Agent Interface on a (gateway) Station	316
Figure 156 – Station_Status	318
 Table 1 – Template for the specification of an interface procedure.....	36
Table 2 – Example of message structure	37
Table 3 – Example of textual message form (corresponding to Table 2).....	38
Table 4 – State transitions table	39
Table 5 – Interoperability testing.....	45
Table 6 – WTB connector pin assignment.....	55
Table 7 – Signals of the Line Unit Interface	72
Table 8 – Link Control encoding	78
Table 9 – NodeControl data structure	110
Table 10 – MyStatus data structure	111
Table 11 – Shared Variables of a node	112
Table 12 – Variables of Main Process.....	112
Table 13 – Lists of Main Process.....	113
Table 14 – ‘START_NODE’	118
Table 15 – ‘MASTER STATES’	118
Table 16 – ‘SLAVE STATES’	119
Table 17 – Time constant values	147
Table 18 – LPI primitives.....	166
Table 19 – Var_Size and Var_Type encoding in a PV_Name.....	173
Table 20 – LMI primitives	195
Table 21 – Routing situations	207
Table 22 – Routing of packets coming from the transport layer	209
Table 23 – Routing of packets coming from a consist network	210
Table 24 – Routing of packets coming from the train bus	211
Table 25 – Message Transport Control encoding	216
Table 26 – Connect_Request	219
Table 27 – Connect_Confirm	219
Table 28 – Disconnect_Request	220
Table 29 – Disconnect_Confirm.....	220
Table 30 – Data_Packet	220
Table 31 – Ack_Packet	221
Table 32 – Nak_Packet	221
Table 33 – Broadcast_Connect (BC1, BC2, BC3).....	221
Table 34 – Broadcast_Data	222

Table 35 – Broadcast_Repeat	222
Table 36 – Broadcast_Stop (BSC, BSO)	223
Table 37 – MTP states	223
Table 38 – MTP incoming events	225
Table 39 – MTP outgoing events	225
Table 40 – MTP control parameters	226
Table 41 – MTP auxiliary variables	226
Table 42 – MTP time-outs (worst case)	228
Table 43 – Implicit actions	228
Table 44 – Compound actions	229
Table 45 – Producer states and transitions	230
Table 46 – Consumer states and transitions	233
Table 47 – TMI primitives	237
Table 48 – States of the MCP machine	248
Table 49 – Incoming Events	249
Table 50 – Outgoing Events	249
Table 51 – Control fields in packets	250
Table 52 – Auxiliary variables	251
Table 53 – MCP constants	252
Table 54 – MCP time-outs	252
Table 55 – MCP Compound actions	253
Table 56 – Filtering of BR packets	254
Table 57 – MCP Producer state event table	255
Table 58 – MCP Consumer state event table	257
Table 59 – AMI primitives	262
Table 60 – Address constants	264
Table 61 – System Address and User Address	267

INTRODUCTION

This part of IEC 61375 specifies one component of the Train Communication Network, the Wire Train Bus (WTB), a serial data communication bus designed primarily, but not exclusively, for interconnecting consists which are frequently coupled and uncoupled, as is the case of international UIC trains.

Figure 1 illustrates the WTB application.

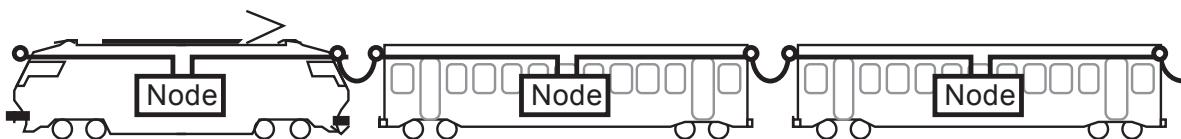


Figure 1 – Wire Train Bus

This standard defines these interfaces as connections to a data communication network, called the Train Communication Network (TCN).

The TCN has a hierarchical structure with two levels of networks, a Train Backbone and a Consist network:

- for interconnecting consists in Open Trains (see definition) such as international UIC trains, this standard specifies a Train Bus called the Wire Train Bus (WTB);
- for connecting standard on-board equipment a Consist network e.g. the Multifunction Vehicle Bus (MVB) can be used.


In the TCN architecture, WTB features Real-Time Protocols, which offer two communication services:

- Process Variables, a distributed, real-time database, periodically refreshed through broadcasting;
- messages, transmitted on demand either as:
 - unicast messages (point-to-point) or/and
 - multicast messages.

WTB in the TCN offers a common Network Management, which allows debugging, commissioning and maintenance over the network.

The Consist network MVB shares Real-Time Protocols and Network Management with WTB. Other implementations of consist networks need adaption to the Real-Time Protocols and Network Management of WTB.

The TCN is structured similarly to the Open System Interconnection model defined in ISO/IEC 7498-1 (see Figure 2).

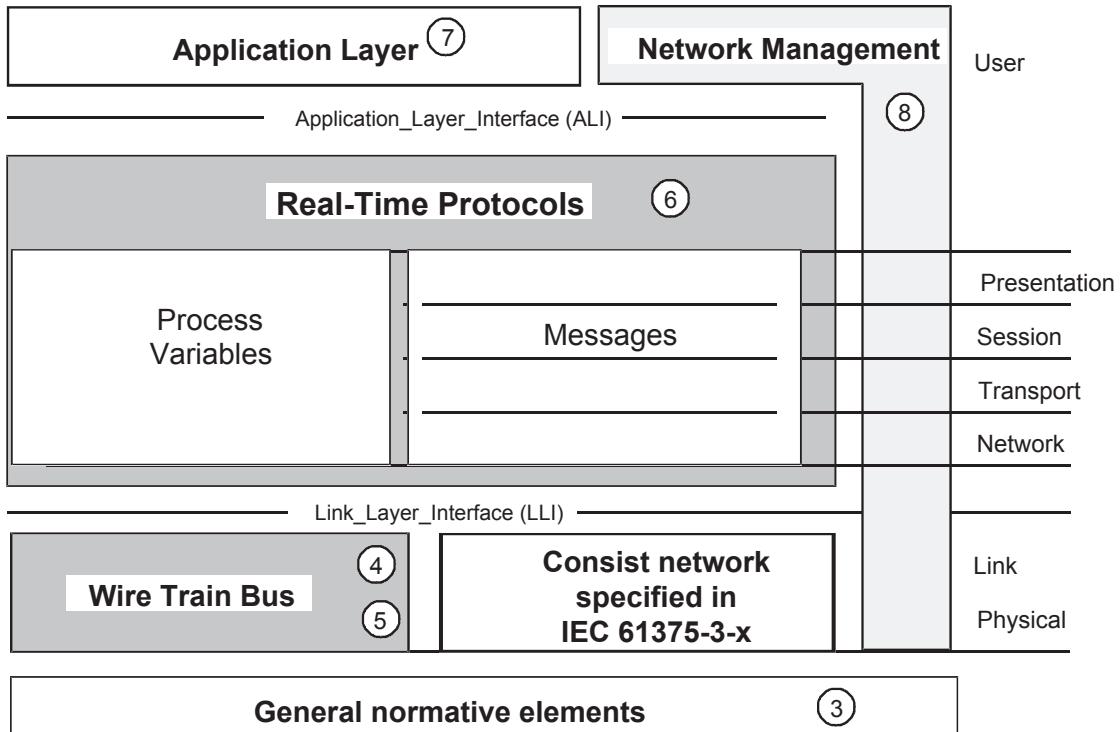

NOTE The circled numbers refer to the clauses of this standard.

Figure 2 – Layering of the TCN

This standard has been, for editorial reasons, divided into eight clauses:

Clause 1

- Scope;

Clause 2

- Normative references;

Clause 3

- Terms and definitions, abbreviations, conventions;

Clause 4 and 5: Wire Train Bus,

- Physical layer and Link Layer Control;

Clause 6: Real-Time protocols,

- Variables: Link Layer Interface and Application Layer Interface;
- Messages: Link Layer Interface, Protocols, Application Layer Interface;
- Data Representation;

Clause 7: Application Layer

- Process Data Marshalling
- WTB Line Fault Location Detection

Clause 8: Train Network Management

- Configuration, supervision and control of the network.

ELECTRONIC RAILWAY EQUIPMENT – TRAIN COMMUNICATION NETWORK (TCN)–

Part 2-1: Wire Train Bus (WTB)

1 Scope

This part of IEC 61375 applies to data communication in Open Trains, i.e. it covers data communication between consists of the said open trains and data communication within the consists of the said open trains.

The applicability of this standard to the train communication bus (WTB) allows for interoperability of individual consists within Open Trains in international traffic. The data communication bus inside consists (e.g. MVB) is given as recommended solution to cope with the said TCN. In any case, proof of compatibility between WTB and a proposed consist network will have to be brought by the supplier.

This standard may be additionally applicable to closed trains and multiple unit trains when so agreed between purchaser and supplier.

NOTE 1 For a definition of Open Trains, Multiple Unit Trains and Closed Trains, see Clause 3.

NOTE 2 Road vehicles such as buses and trolley buses are not considered in this standard.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60571, *Electronic equipment used on rail vehicles*

IEC 60807 (all parts), *Rectangular connectors for frequencies below 3 MHz*

IEC 61375-1, *Electronic railway equipment – Train communication network (TCN) – Part 1: General architecture*

IEC 61375-2-2:2012, *Electronic railway equipment – Train communication network (TCN) – Part 2-2: Wire Train Bus conformance testing*

IEC 61375-3-1, *Electronic railway equipment – Train communication network (TCN) – Part 3-1: Multifunction Vehicle Bus (MVB)*

ISO/IEC 8802-2, *Information technology – Telecommunications and information exchange between systems – Local and metropolitan area networks – Specific requirements – Part 2: Logical link control*

ISO/IEC 8824 (all parts), *Information technology – Abstract Syntax Notation One (ASN.1)*

ISO/IEC 8825 (all parts), *Information technology – ASN.1 encoding rules*

ISO/IEC 8859-1, *Information technology – 8-bit single-byte coded graphic character sets – Part 1: Latin alphabet No. 1*

ISO/IEC 9646 (all parts), *Information technology – Open Systems Interconnection – Conformance testing methodology and framework*

ISO/IEC 10646, *Information Technology – Universal Multipl-Octet Coded Character Set (UCS)*

ISO/IEC 13239, *Information technology – Telecommunications and information exchange between systems – High-level data link control (HDLC) procedures*

ITU-T Recommendation V24, *List of definitions for interchange circuits between data terminal equipment (DTE) and data-circuit terminating equipment (DCE)*

ITU-T Recommendation Z.100, *Specification and Description Language (SDL)*

IEEE 754, *Standard for Binary Floating-Point Arithmetic*

UIC CODE 556, *Information transmission in the train (train-bus)*

UIC CODE 557, *Diagnostics on passenger rolling stock*